


Emphatec VanGuard®

AC Outlet

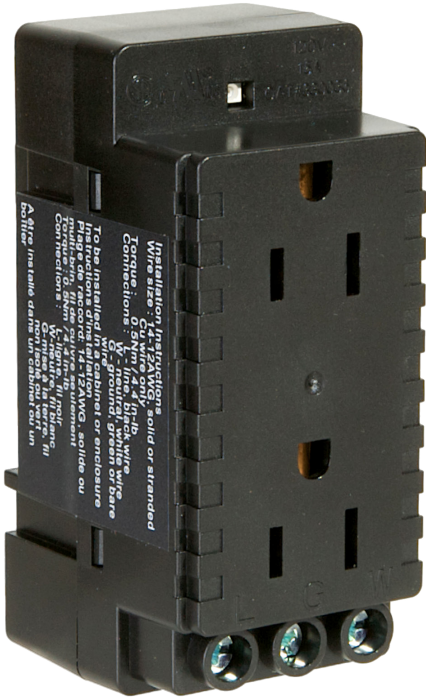

Features

- Duplex outlet requires just 42mm of DIN rail
- Includes power status LED
- Latching mounting foot makes installation and removal from DIN rail easy
- CSA certified and UL recognized

The Emphatec VanGuard® AC Outlet makes adding a 120V maintenance outlet to control cabinets quick and easy. It mounts on standard 35mm DIN rail and requires just 42mm of rail space. An LED indicates that 120V is applied to the module. The terminations accept slotted or Phillips screwdrivers. The mounting foot includes a latching lock - slide it open, mount the module on the DIN rail and slide the lock closed.


The Emphatec VanGuard® AC Outlet is CSA certified and UL recognized.

Ordering Data

Type	Order Number
Emphatec VanGuard® AC Outlet	330036

Technical Data

Emphatec VanGuard® AC Outlet	
Order Number	330036
Voltage:	120V
Current:	15A max.
Wire Size	14 - 12AWG Solid or stranded Copper only
Tightening torque:	0.5Nm / 4.4 in-lb
Terminations:	Screw terminals, slotted or Phillips "L":line "W":neutral "G":ground
Dimensions:	94 x 42 x 50mm

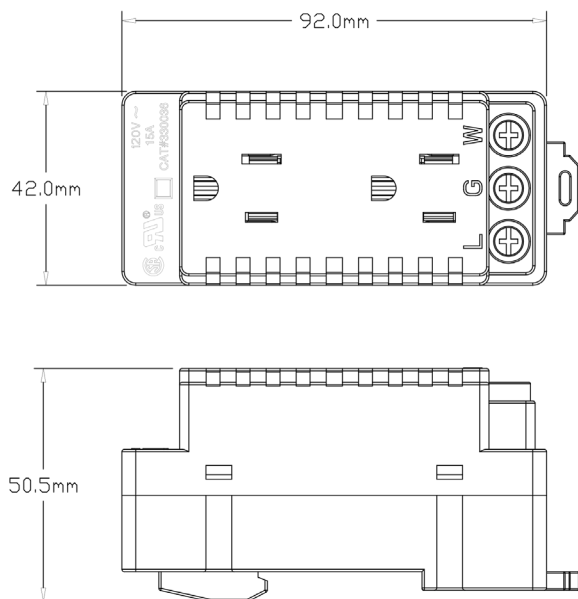

Weidmuller Ltd.

10 Spy Court
 Markham, ON
 Canada
 L3R 5H6
 Toll Free: (800)268-4080

www.klippon-engineering.com/emphatec

Subject to technical changes

06/21 CAN KE | LIT 1006